
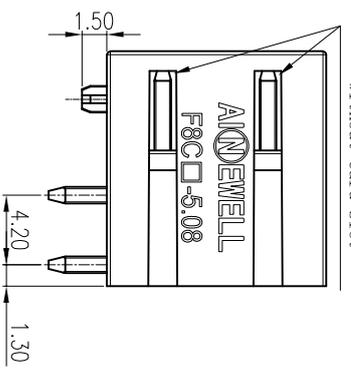
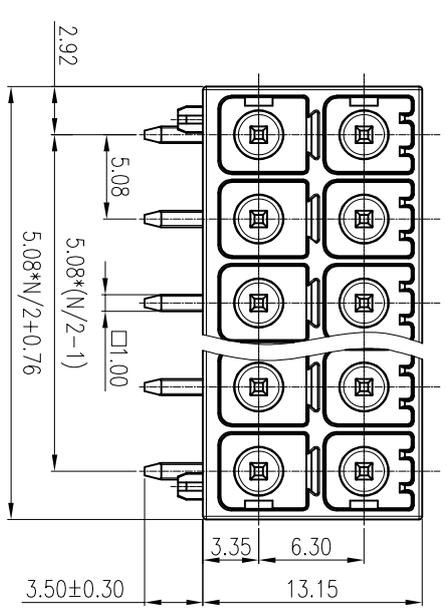


REV	DESCRIPTION	DRW.	DATE
00	初版发行	C.W	2024.01.07

04~12P: 带卡槽/04P to 12P
with card slot
14P~48P: 不带卡槽/14P to 48P
without card slot

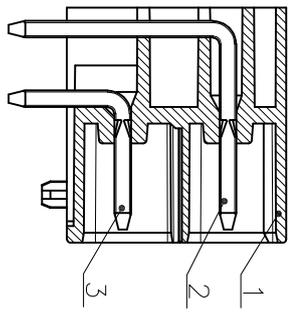

Notes/备注:

1. Electrical properties/电气特性

UL Standard/UL标准

Use Group/应用组别	B	C	D
Rated Voltage/额定电压 (V)	300	/	300
Rated Current/额定电流 (A)	10	/	10
Withstanding voltage/工频耐受电压	AC 1600V/1min		

IEC Standard/IEC标准

Rated Voltage/额定电压 (V): 630

Rated Current/额定电流 (A): 12

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	630	320	320
Rated Impulse Voltage/冲击耐受电压 (kV)	4	4	4


2. Environmental safety/环境安全

Operating temperature/工作温度范围(°C): -40~+105


RoHS compliant/符合RoHS环保要求

Part No./料号说明:
F8CR-5.08-XXP-X

Poles/针数	Color/颜色
04: 4Poles	1: Brown/棕色
06: 6Poles	2: Red/红色
...	3: Orange/橙色
48: 48Poles	4: Yellow/黄色
	5: Green/绿色
	6: Blue/蓝色
	7: Purple/紫色
	8: Grey/灰色
	9: White/白色
	A: Black/黑色

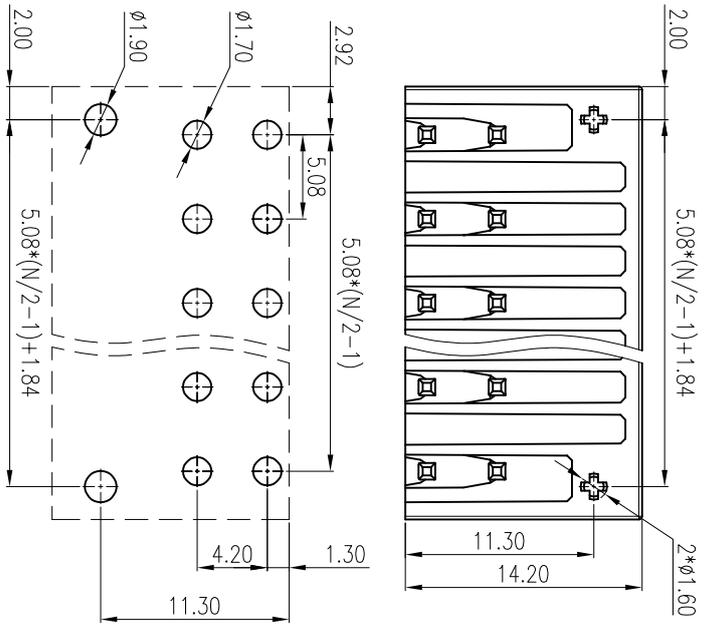

PCB LAYOUT

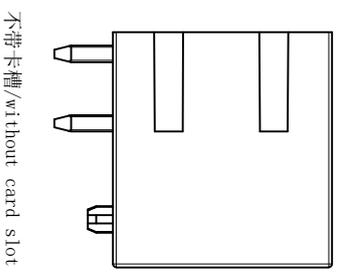

Nominal dimension Tolerances (mm)

	0 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 180	180 to 250	250 to 320
over	±0.25	±0.3	±0.35	±0.5	±0.7	±0.9	±1.0	±1.2
to								

APP. M.X.B	DATE: 2024.01.07	PART NO.: F8CR-5.08-XXP-X	
CHK. M.C.N	DATE: 2024.01.07		
DRW. C.W	DATE: 2024.01.07	DRAWING TYPE: Customer Drawing	
PROJECTION	UNITS: mm	SCALE: 3:1	SHEET/OF: 1/1

AINDEWELL 昆山艾尼维尔电子有限公司
KUN SHAN AINDEWELL ELECTRONICS CO.,LTD