

REV	DESCRIPTION	DRW.	DATE
00	初版发行	M.C.N	2022.09.19

Notes/备注:

1. Electrical properties/电气特性
UL Standard/UL标准

Use Group/应用组别	B	C	D
Rated Voltage/额定电压 (V)	300	/	300
Rated Current/额定电流 (A)	15	/	10
Withstanding voltage/工频耐电压	AC 1600V/1min		



IEC Standard/IEC标准

Rated Voltage/额定电压 (V) : 320
Rated Current/额定电流 (A) : 16

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	630	320	250
Rated Impulse Voltage/冲击耐电压(kV)	4	4	4

3. Environmental safety/环境安全

Operating temperature/工作温度范围(°C): -40~+105
RoHS compliant/符合RoHS环保要求

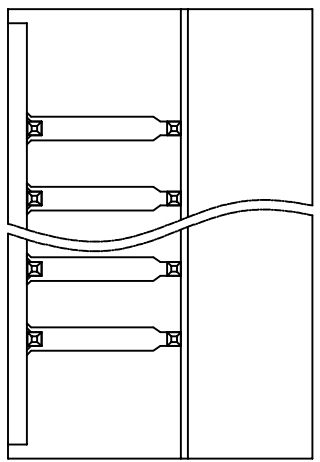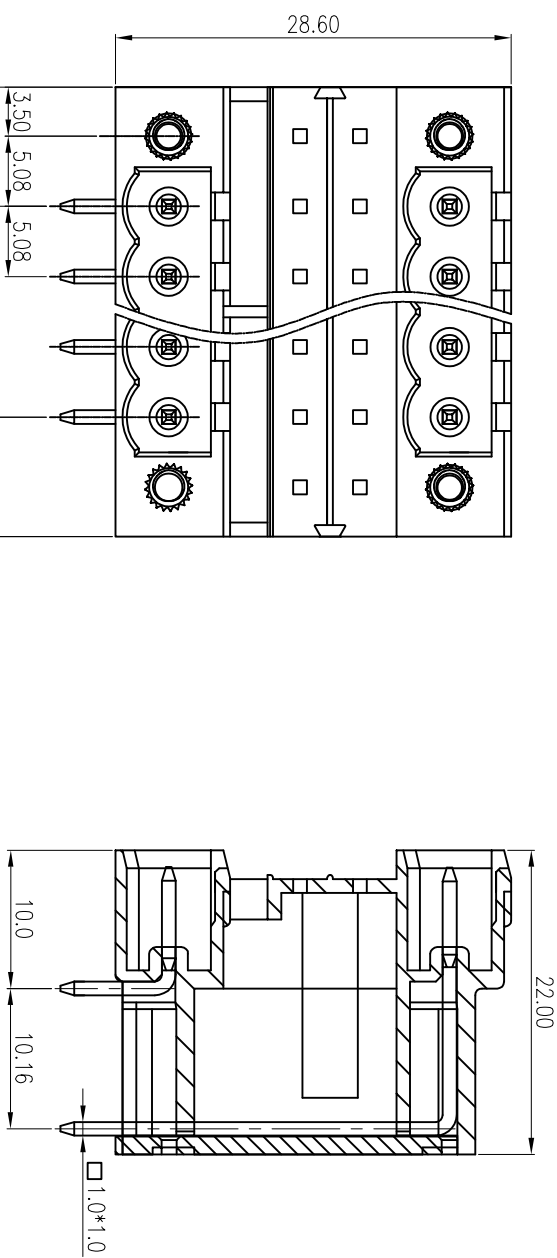

P.C.B. LAYOUT

Part No./料号说明:
F8HRM-5.08-XXP-X-W01

Nominal dimension Tolerances (mm)

0 to 18	18 to 30	30 to 50	50 to 80	80 to 120	120 to 180	180 to 250	250 to 320
±0.25	±0.3	±0.35	±0.5	±0.7	±0.9	±1.0	±1.2

Poles/极数

04: 4Poles
06: 6Poles
..: 48: 48Poles

Color/颜色

1: Brown/棕色
2: Red/红色
3: Orange/橙色
4: Yellow/黄色
5: Green/绿色
6: Blue/蓝色
7: Purple/紫色
8: Grey/灰色
9: White/白色
A: Black/黑色

APP.	DATE:	PART NO.:	F8HRM-5.08-XXP-X-W01		
CHK.	DATE:				
DRW. M.C.N	DATE: 2022.09.19	DRAWING TYPE:	Customer Drawing		
PROJECTION	UNITS: mm	SCALE: 2.5:1	SHEET/OF:	1/1	

AIN EWELL 昆山艾尼维尔电子有限公司
KUN SHAN AINEWELL ELECTRONICS CO.,LTD