

REV	DESCRIPTION	DRW.	DATE
00.1	初版发行	M.C.N	2024.07.05

Notes/备注:

1. Electrical properties/电气特性
UL Standard/UL 标准

Use Group/应用组别	B	C	D
Rated Voltage/额定电压 (V)	600	600	/
Rated Current/额定电流 (A)	115	115	/
Withstanding voltage/工频耐电压	AC 3500V/1Min		

IEC Standard/IEC 标准

Rated Voltage/额定电压 (V): 1000
Rated Current/额定电流 (A): 125

Overvoltage Category/过电压类别 /Pollution Degree/污染等级	II/2	III/2	III/3
Voltage/电压 (V)	1000	1000	1000
Rated Impulse Voltage/冲击耐电压(KV)	8	8	8



2. Connection data/连接数据

Wire range/线径范围(AWG/mm²): 20~2/0.5~35
Stripping length/剥线长度(mm): 18
Wire tightening torque/导线扭矩(N.m): 2.5

3. Environmental safety/环境安全

Operating temperature/工作温度范围(°C): -40~+105
RoHS compliant/符合RoHS环保要求

螺丝锁紧

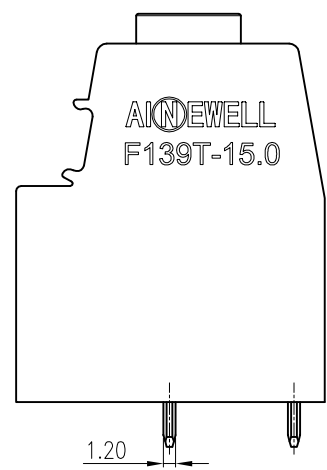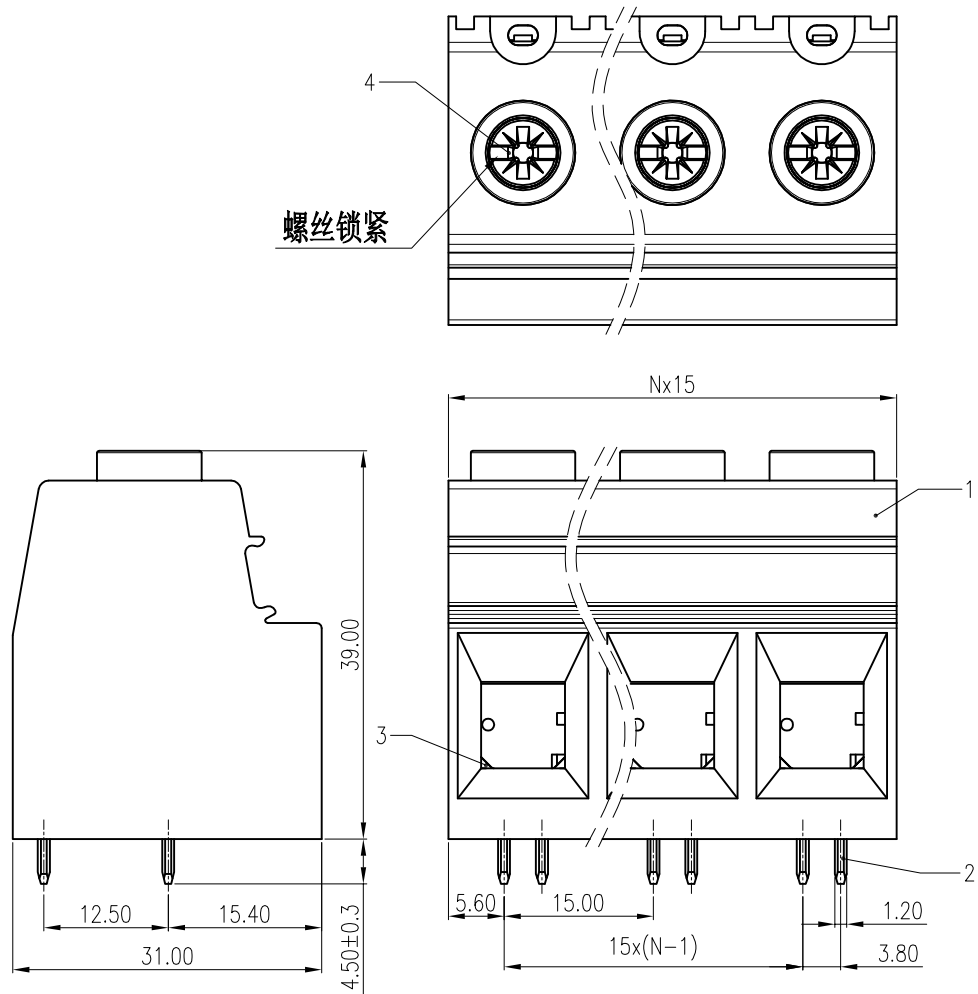


Part No./料号说明:
F139T-15.0-XXP-2-X-01

Poles/极数
02: 2Poles
03: 3Poles
...
12: 12Poles

Color/颜色
1: Brown/棕色
2: Red/红色
3: Orange/橙色
4: Yellow/黄色
5: Green/绿色
6: Blue/蓝色
7: Purple/紫色
8: Grey/灰色
9: White/白色
A: Black/黑色

Nominal dimension		Tolerances (mm)					
0	over 18	over 30	over 50	over 80	over 120	over 180	over 250
to 18	to 30	to 50	to 80	to 120	to 180	to 250	to 320
	±0.25	±0.3	±0.35	±0.5	±0.7	±0.9	±1.2

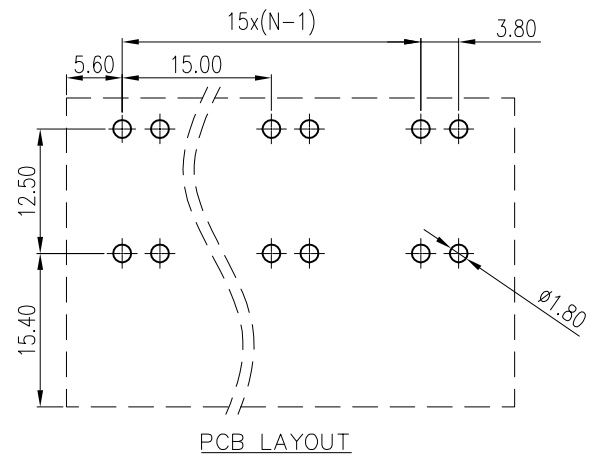

APP. M.X.B	DATE: 2024.07.05	PART NO.: F139T-15.0-XXP-2-X-01	
CHK. C.W	DATE: 2024.07.05	DARWING TYPE: Customer Drawing	
DRW. M.C.N	DATE: 2024.07.05	UNITS: mm	SCALE: 1.8:1 SHEET/OF: 1/1
PROJECTION			
		昆山艾尼维尔电子有限公司 KUN SHAN AINEWELL ELECTRONICS CO.,LTD	